

34W / 2875lm / 3000K / DALI / Diffuse /
1399mm

61361

Design: O/M
LED light source with good colour consistency and
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



- Structure**

 - 1 Profile
 - 2 End caps
 - 3 Fitting accessories
 - 4 Profile coupling
- Diffuser**


 - A Polycarbonate frost diffuser
- Light Source**

 - B LED Modules


LED	3000K	Light Source	Luminaire
Power		34W	40W
Flux		6125lm	2875lm
Efficiency		180lm/W	72lm/W
LOR		-	47%
UGR		-	<25



Beam angle
Diffuse



Weight
0,58Kg

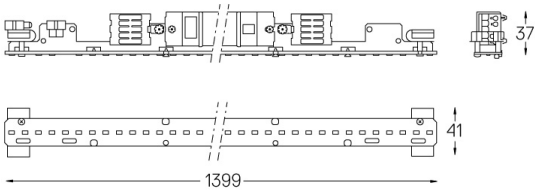

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com
Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603211, 89603216