


32W / 1450lm / 3000K / DALI / Wallwasher /
1200mm

61250

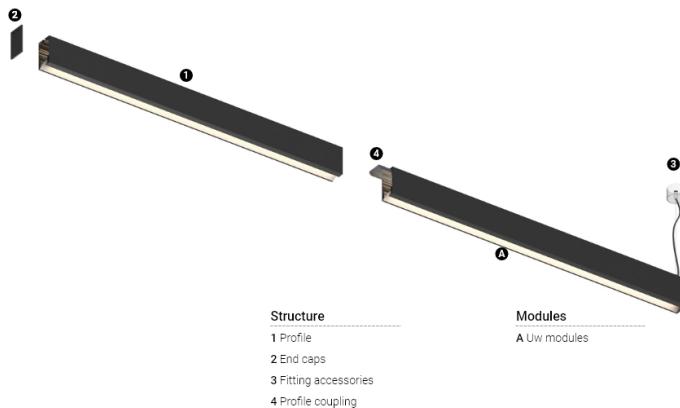

Design: O/M + Bartenbach GmbH

LED light source with excellent colour consistency

and long operation lifespan.

Asymmetrical aluminium reflector.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / power supply included.

IP20 | 230Vac | 50/60Hz



CE

LED 3000K

Light Source

Luminaire

Power

32W

38W

Flux

3200lm

1450lm

Efficiency

100lm/W

38lm/W

LOR


-

45%

UGR

-

-



Beam angle
Wallwasher

Application



Weight
2Kg

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

