

Design: O/M + Bartenbach GmbH

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / power supply included.
IP20 | 230Vac | 50/60Hz




LED	3000K	Lichtquelle	Leuchte
Leistung	26W		32W
Strom	2580lm		1880lm
Effizienz	99lm/W		59lm/W
LOR	-		0.7286821705426356
UGR	-		<13



Abstrahlwinkel
Medium 30°

Anwendung

Gewicht
0,5Kg

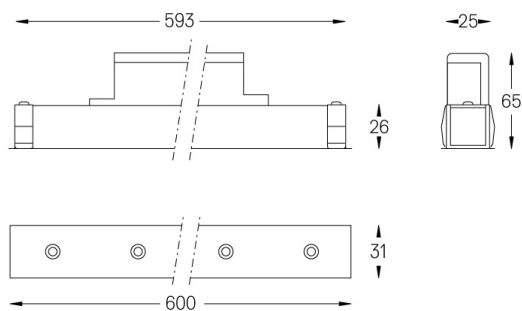

Ausführungen

- .01 Weiß / RAL 9010
- .02 Schwarz / RAL 9005