

Design: O/M + Bartenbach GmbH

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / power supply included.
IP20 | 230Vac | 50/60Hz




| LED | 3000K | Lichtquelle | Leuchte |
|-----------|--------|-------------|--------------------|
| Leistung | 26W | | 32W |
| Strom | 2580lm | | 1960lm |
| Effizienz | 99lm/W | | 61lm/W |
| LOR | - | | 0.7596899224806202 |
| UGR | - | | <16 |



Abstrahlwinkel
Flood 50°

Anwendung

Gewicht
0,5Kg

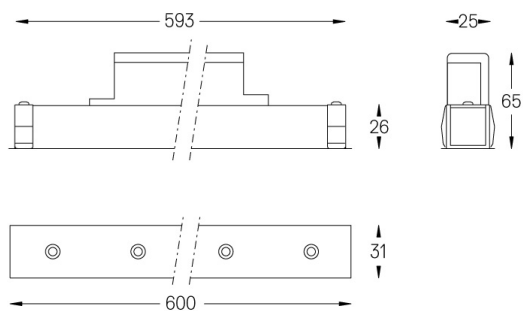

Ausführungen

- .01 Weiß / RAL 9010
- .02 Schwarz / RAL 9005