


Design: O/M + Bartenbach GmbH

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




|  LED | 3000K | Lichtquelle | Leuchte            |
|---|-------|-------------|--------------------|
| Leistung  |       | 20W         | 24W                |
| Strom   |       | 2520lm      | 2040lm             |
| Effizienz   |       | 127lm/W     | 87lm/W             |
| LOR   |       | -           | 0.8100000000000001 |
| UGR   |       | -           | <19                |



Abstrahlwinkel  
Wide flood 80°

Anwendung

Gewicht

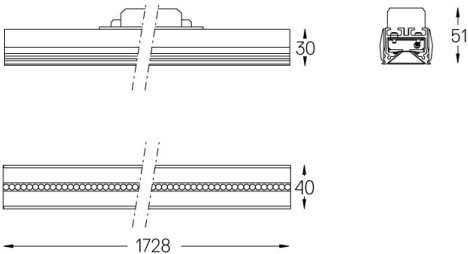

### Ausführungen

- .01 Weiß / RAL 9010
- .02 Schwarz / RAL 9005