



Design: Eduardo Souto de Moura

Emergency pendant luminaire with body made of steel and electrostatic 100% polyester paint with textured finish.

Single sided pictogram, with polycarbonate structure and adhesive film, included.

The same luminaire allows maintained or non-maintained mode.

Luminaire with self-testing mode.

Prepared for remote control (rest mode).

3-hours autonomy.

Compliant with the following standards:

EN60598-2-22 / EN60598-1

Power supply included.

IP44 | IK07 | 230Vac | 50/60Hz



| LED | 5000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 2,4W | 3,1W |
| Flux | | 340lm | 65lm |
| Efficiency | | 142lm/W | 21lm/W |
| LOR | | - | 19% |
| UGR | | - | - |




Beam angle

-

Application

Weight
2Kg

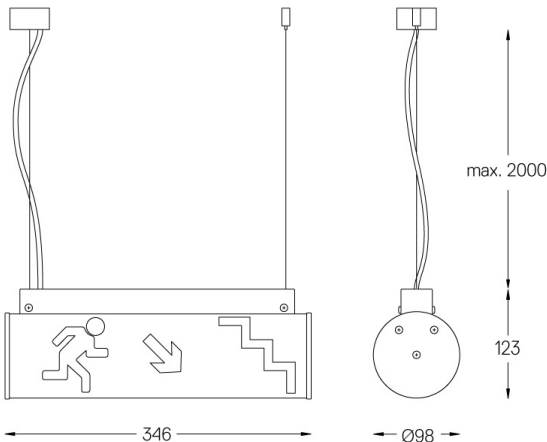

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

54036 Pendant direct fitting accessory

Optional

56051 Clear Base DALI
ø60x35mm