



Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Modules

- A inFinit module (middle)
- B inFinit module (end)
- C Indirect module

Design: O/M  
One 2m steel cable (Ø1,2mm) for infinit pendant  
direct/indirect application with millimetric height  
adjustment system.  
For Start/end



	Light Source	Luminaire
Power	-	-
Flux	-	-
Efficiency	-	-
LOR	-	-
UGR	-	-




Beam angle

-

Application

Weight

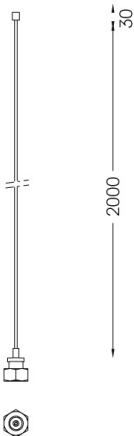

Finishes

.99

Mandatory  
59055 Pendant direct/indirect fitting acessory (middle)  
56051 Clear Base DALI  
ø60x35mm