

10W / 940lm / 4000K / DALI / Flood 37° /  
ø75mm

60355



Design: O/M

Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing accessory for flush version supplied separately.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz




| LED        | 4000K   | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power      | 10W     | 12,5W        |           |
| Flux       | 1240lm  | 940lm        |           |
| Efficiency | 124lm/W | 75lm/W       |           |
| LOR        | -       | 76%          |           |
| UGR        | -       | <22          |           |



|             |           |
|-------------|-----------|
| Beam angle  | Flood 37° |
| Application |           |
| Weight      | 0,38Kg    |



Ø70 (trim version)

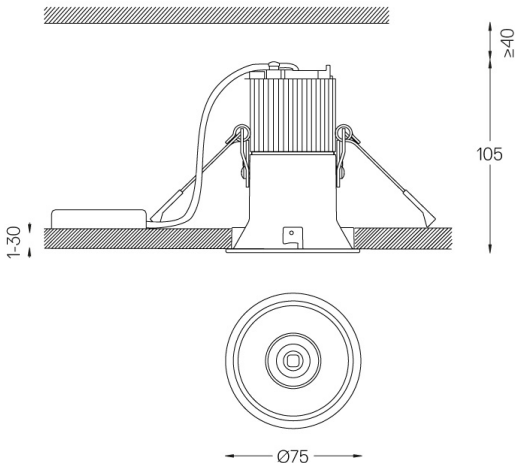

### Finishes

- .04 Matt White
- .05 Matt Black

### Optional

- 59063** Flush accessory (12.5mm ceilings)  
176x17mm
- 59064** Flush accessory (15mm ceilings)  
176x19,5mm
- 59065** Flush accessory (25mm ceilings)  
176x29,5mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com  
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 2053560247H