

19W / 1630lm / 2700K / DALI / Flood 46° /  
ø100mm

60365



Design: O/M

Ceiling-recessed luminaire made of aluminium die-cast.

Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz




| LED        | 2700K   | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power      | 19W     |              | 23,2W     |
| Flux       | 2060lm  |              | 1630lm    |
| Efficiency | 108lm/W |              | 70lm/W    |
| LOR        | -       |              | 79%       |
| UGR        | -       |              | <22       |



|                         |
|-------------------------|
| Beam angle<br>Flood 46° |
| Application<br>         |
| Weight<br>0,5Kg         |



Ø95 (trim version)

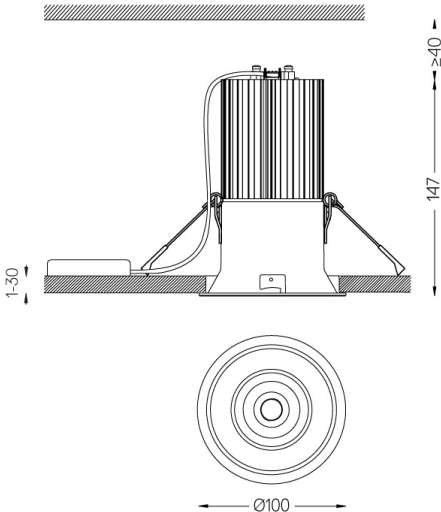

### Finishes

- .04 Matt White
- .05 Matt Black

### Optional

- 59066** Flush accessory (12.5mm ceilings)  
201x17mm
- 59067** Flush accessory (15mm ceilings)  
201x19,5mm
- 59068** Flush accessory (25mm ceilings)  
201x29,5mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com  
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRC-27G2000-C-73