

## Beam IP54

4,5W / 340lm / 4000K / On/Off / Diffuse /  
ø75mm

60425




Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing accessory for flush version supplied separately.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / power supply included  
IP54 | 230Vac | 50/60Hz



 LED	4000K	Light Source	Luminaire
Power	4,5W		5,8W
Flux	620lm		340lm
Efficiency	138lm/W		59lm/W
LOR	-		55%
UGR	-		<25

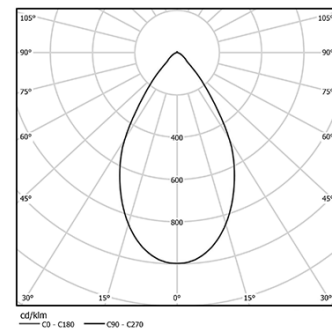

Beam angle  
Diffuse


## Application



Weight  
0,38Kg



070 (trim version)

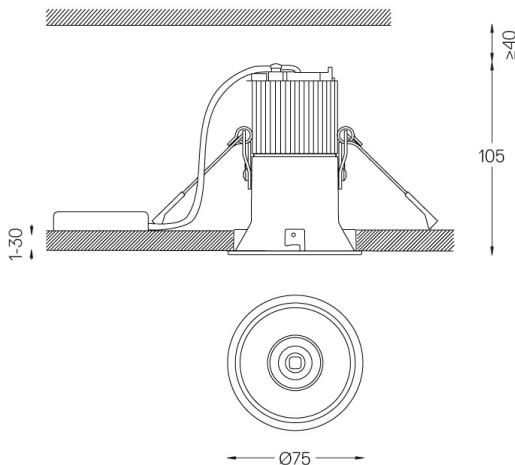

## Finishes

- .04 Matt White  
● .05 Matt Black

## Optional

**59063 Flush accessory (12.5mm ceilings)**

176x17mm

**59064 Flush accessory (15mm ceilings)**

176x19,5mm

**59065 Flush accessory (25mm ceilings)**

176x29,5mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

---

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E  
Model Identifier 2053560247L