

inFinit Pendant direct/indirect

14+28W / 1360+1280lm / 3000K / DALI /
Flood 64° / batwing / 1192mm

60530

Product timing available by request




Design: OM + Bartenbach GmbH
Pendant direct and indirect luminaire with housing made of aluminium in matte finish.
Aluminium anodised end caps with matt finish.
Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.
Indirect light: Lenses for batwing effect protected by a transparent polycarbonate diffuser.
Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



| LED | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-------------|
| Power | | 14+28W | 16+32W |
| Flux | | 1680+1600lm | 1360+1280lm |
| Efficiency | | 78lm/W | 52lm/W |
| LOR | | - | 80% |
| UGR | | - | <13 |

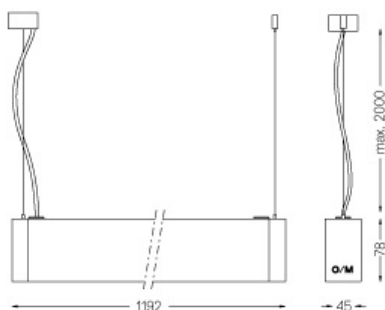

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59054 Pendant direct/indirect fitting accessory
56051 Clear Base DALI
ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com