



Design: OM + Bartenbach GmbH

Surface or pendant luminaire with housing made of aluminium with 25 micron maximum corrosion resistance anodization in matte finish or electrostatic 100% polyester paint with textured finish.

Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured-finish.

Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

Fitting accessories ordered separately. 2200-5000K Tunable White.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam


Power supply included.

DALI DT8

IP20 | 230Vac | 50/60Hz





| LED | 2200K-5000K | Light Source | Luminaire |
|------------|-------------|--------------|-----------|
| Power | | 16W* | 19,5W* |
| Flux | | 1720lm* | 790lm* |
| Efficiency | | 108lm/W | 40lm/W |
| LOR | | - | 46% |
| UGR | | - | - |



Beam angle
Wallwasher

Application

Weight
2Kg

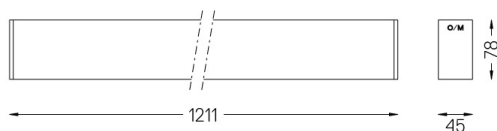

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

Mandatory

54036 Pendant direct fitting accessory

56051 Clear Base DALI

ø60x35mm