

U35

Made-to-measure

20W / 1825lm / 3000K / DALI / Diffuse /
1399mm

60902


Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz

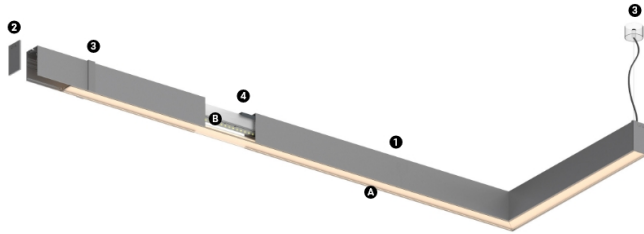


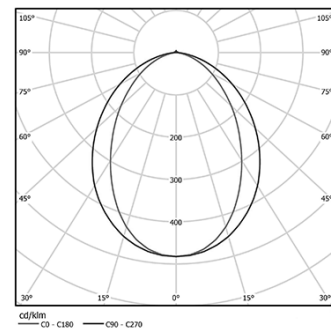
Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Diffuser


- A Polycarbonate frost diffuser
- Light Source**
- B LED Modules

 LED	3000K	Light Source	Luminaire
Power	20W	24,4W	
Flux	3575lm	1825lm	
Efficiency	179lm/W	75lm/W	
LOR	-	51%	
UGR	-	<25	




Beam angle
Diffuse

Application



Weight
0,58Kg

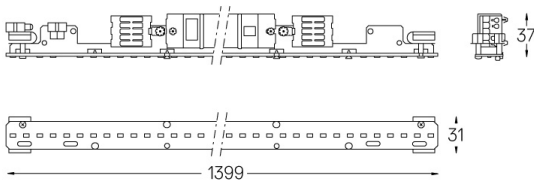

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603211, 89603216