


Compatibility with other modules must be confirmed
with support@om-light.com

Design: OM + Bartenbach
GmbH
Module with linear extruded lenses (Lightstream)
combined with a secondary reflector, integrated into
an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



 3000K	Light Source	Luminaire
Power	20W	24W
Flux	2520lm	2040lm
Efficiency	127lm/W	87lm/W
LOR	-	0.8100000000000001
UGR	-	<19




Beam angle
Wide flood 80°

Application

Weight

 mm

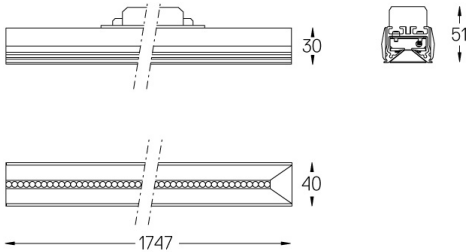

Finishes

-  .01 White / RAL 9010
-  .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com