


28W* / 2900lm* / 2200K-5000K / DALI /
Wide flood 76° / 1440mm

61240

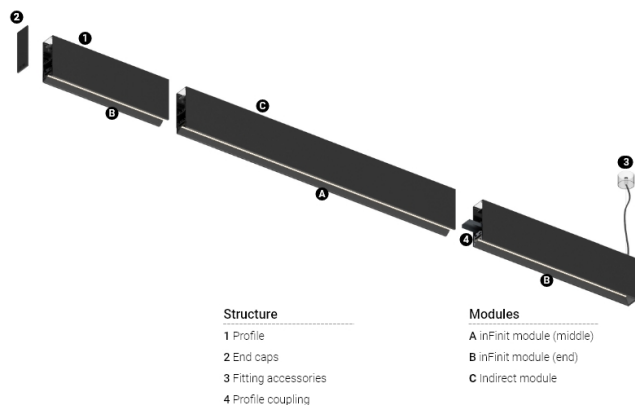

Design: OM + Bartenbach

GmbH


Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.


LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz




 LED	2200K-5000K	Light Source	Luminaire
Power		28W*	34,1W*
Flux		3750lm*	2900lm*
Efficiency		134lm/W	85lm/W
LOR		-	77%
UGR		-	<16



Beam angle
Wide flood 76°

Application



Weight



Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

