

## U120

### Made-to-measure

**57W / 4200lm / 3000K / On/Off + E-KIT /  
Diffuse / 1715mm**

62130


Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz

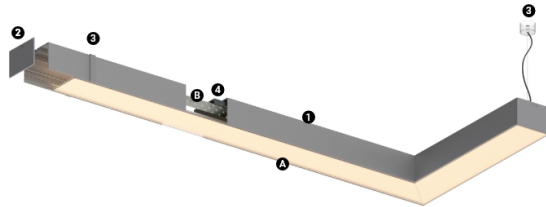


## Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

## Diffuser


- A Polycarbonate frost diffuser
- Light Source**
- B LED Modules

 LED	3000K	Light Source	Luminaire
Power		57W	67,1W
Flux		6780lm	4200lm
Efficiency		119lm/W	63lm/W
LOR		-	62%
UGR		-	<25




Beam angle  
Diffuse

## Application



Weight  
0,8Kg

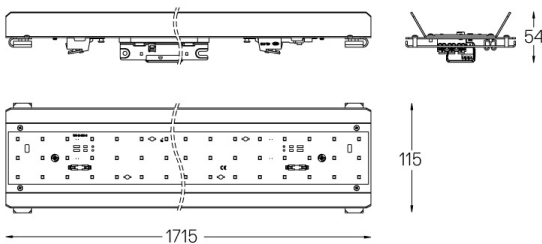

## Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)

### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class D  
Model Identifier WU-M-536-S-BC-830