

U120

Made-to-measure

**35W / 2900lm / 3000K / DALI / Diffuse /
571mm**

62133


Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz

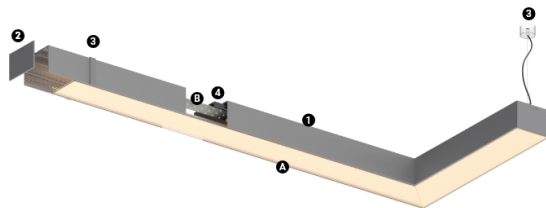


Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Diffuser


- A Polycarbonate frost diffuser
- Light Source**
- B LED Modules

 LED	3000K	Light Source	Luminaire
Power		35W	41,2W
Flux		4700lm	2900lm
Efficiency		134lm/W	70lm/W
LOR		-	62%
UGR		-	<25




Beam angle
Diffuse

Application



Weight
0,5Kg

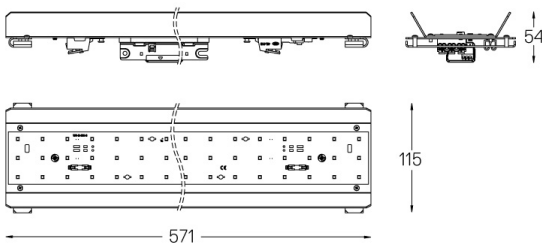

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class D
Model Identifier WU-M-536-S-BC-830