

U120

Made-to-measure

52W / 4650lm / 4000K / On/Off / Diffuse /
857mm

62147


Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz

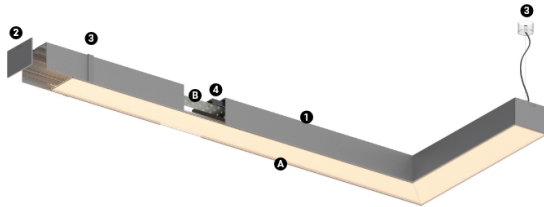


Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Diffuser


- A Polycarbonate frost diffuser
- Light Source**
- B LED Modules

 LED	4000K	Light Source	Luminaire
Power	52W	62,4W	
Flux	7500lm	4650lm	
Efficiency	142lm/W	75lm/W	
LOR	-	62%	
UGR	-	<25	




Beam angle
Diffuse

Application



Weight
0,5Kg

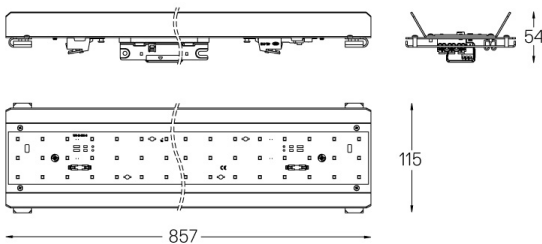

Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
Model Identifier WU-M-526-S-BC-840, WU-M-536-S-BC-840