


87W / 7750lm / 4000K / DALI / Diffuse /
1429mm

62163


Design: O/M
LED light source with good colour consistency and
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

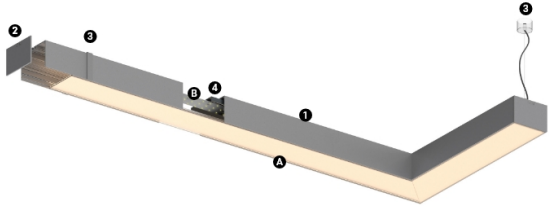

- | | |
|-----------------------|-----------------------|
| Structure | Diffuser |
| 1 Profile | A Polycarbonate frost |
| 2 End caps | diffuser |
| 3 Fitting accessories | Light Source |
| 4 Profile coupling | B LED Modules |

LED	4000K	Light Source	Luminaire
Power		87W	101W
Flux		12500lm	7750lm
Efficiency		142lm/W	77lm/W
LOR		-	62%
UGR		-	<25



Beam angle
Diffuse

Application

Weight
0,5Kg



Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
Model Identifier WU-M-526-S-BC-840, WU-M-536-S-BC-840

