

## U120

### Made-to-measure

**57W / 4980lm / 4000K / DALI + E-KIT /  
Diffuse / 1715mm**

62166


Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz

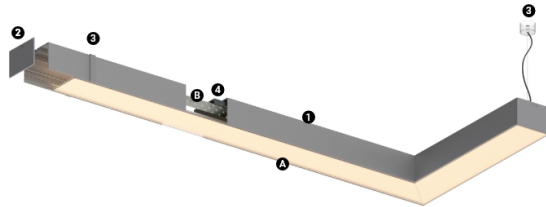


## Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

## Diffuser


- A Polycarbonate frost diffuser
- Light Source**
- B LED Modules

 LED	4000K	Light Source	Luminaire
Power	57W	67,1W	
Flux	8040lm	4980lm	
Efficiency	141lm/W	74lm/W	
LOR	-	62%	
UGR	-	<25	



Beam angle  
Diffuse

## Application



**Weight**  
**0,51Kg**

## Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)

### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier WU-M-536-S-BC-840

