


20+9W / 1775+740lm / 4000K / DALI /  
Diffuse / batwing / 1399mm

62326

Design: O/M  
LED light source with good colour consistency and  
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

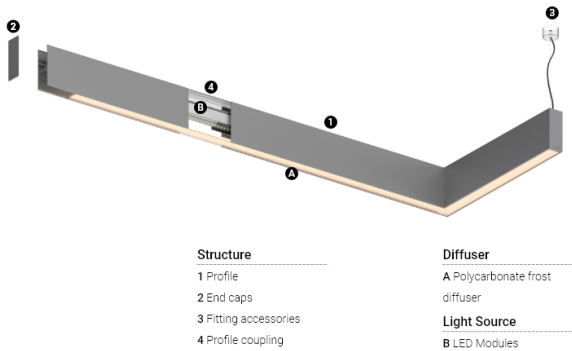

LED	4000K	Light Source	Luminaire
Power		20+9W	24,4+11,3W
Flux		3775+1180lm	1775+740lm
Efficiency		171lm/W	70lm/W
LOR		-	51%
UGR		-	<22



Beam angle  
Diffuse / batwing

Application



Weight  
0,6Kg



### Finishes

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)

Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: [support@om-light.com](mailto:support@om-light.com)

### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
and E

Model Identifier 89603212, 89603217, WU-M-594-840