

H45 Made-to-measure

24+13W / 2130+1110lm / 4000K / DALI /
Diffuse / batwing / 1679mm

62328

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling


Diffuser

A Polycarbonate frost diffuser

Light Source

B LED Modules

| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-------------|
| Power | | 24+13W | 29,3+15,9W |
| Flux | | 4530+1770lm | 2130+1110lm |
| Efficiency | | 170lm/W | 72lm/W |
| LOR | | - | 51% |
| UGR | | - | <22 |




Beam angle
Diffuse / batwing

Application



Weight
0,8Kg

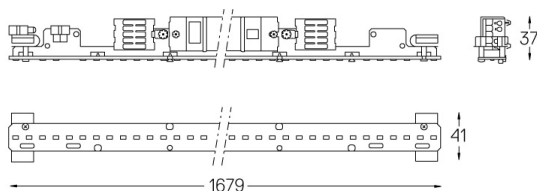

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C and E

Model Identifier WU-M-594-840, 89603217