

27W / 2960lm / 2700K / On/Off / Prismatic /
1119mm

62975


Design: O/M
LED light source with good colour consistency and
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




- | | |
|-----------------------|-----------------------|
| Structure | Diffuser |
| 1 Profile | A Polycarbonate frost |
| 2 End caps | diffuser |
| 3 Fitting accessories | Light Source |
| 4 Profile coupling | B LED Modules |

LED	2700K	Light Source	Luminaire
Power		27W	32,9W
Flux		4780lm	2960lm
Efficiency		177lm/W	90lm/W
LOR		-	62%
UGR		-	<22




Beam angle
Prismatic

Application



Weight
0,57Kg

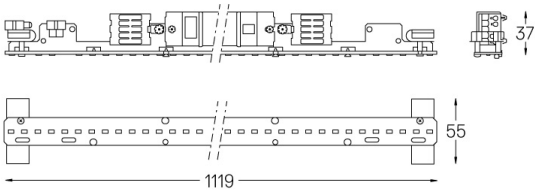

Finishes

Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class D
Model Identifier 89603215