

## Tubo 50

41W / 5370lm / 2700K / On/Off / Diffuse /  
1752mm

63067



Design: Eduardo Souto de Moura  
Surface or pendant luminaire with tubular shock-resistant frosted polycarbonate body with 50mm diameter.  
Clear polycarbonate end caps with marked installation angles. Supplied with 30mm plastic cable gland that prevents condensation within luminaire. Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP67 | IK08 | 230Vac | 50/60Hz




LED	2700K	Light Source	Luminaire
Power		41W	48,2W
Flux		7170lm	5370lm
Efficiency		175lm/W	111lm/W
LOR		-	75%
UGR		-	<28



Beam angle  
Diffuse

Application

Weight  
1,6Kg

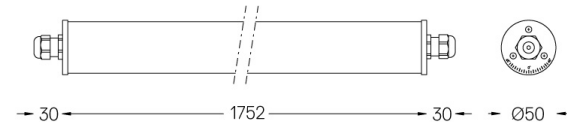

### Finishes

.25 Frost

### Mandatory

43701 Surface fitting accessory  
43703 Pendant fitting accessory

### Optional

59057 Stainless steel fitting accessory

### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C Model Identifier 28004771