


Compatibility with other modules must be confirmed  
with [support@om-light.com](mailto:support@om-light.com)

Design: OM + Bartenbach  
GmbH

Module with linear extruded lenses (Lightstream)  
combined with a secondary reflector, integrated into  
an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




 <b>4000K</b>	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	53W	62W
<b>Flux</b>	7500lm	6000lm
<b>Efficiency</b>	142lm/W	97lm/W
<b>LOR</b>	-	0.8
<b>UGR</b>	-	<19



Beam angle  
**Wide flood 80°**

Application

Weight

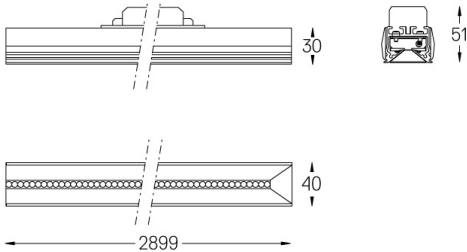

- Finishes
- .01 White / RAL 9010
  - .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)

Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: [support@om-light.com](mailto:support@om-light.com)