

33W / 3400lm / 3000K / DALI / Flood 65° / 2880mm

63168

Compatibility with other modules must be confirmed with [support@om-light.com](mailto:support@om-light.com)

Design: OM + Bartenbach GmbH  
Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



	3000K	Light Source	Luminaire
Power	33W		39W
Flux	4200lm		3400lm
Efficiency	127lm/W		87lm/W
LOR	-		0.8100000000000001
UGR	-		<13



Beam angle  
Flood 65°  
  
Application  
  
Weight

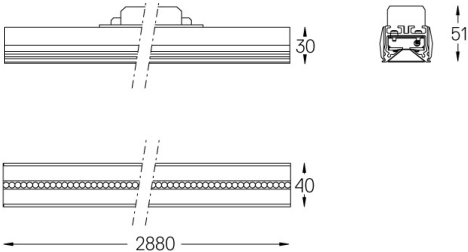

- Finishes
- ☐ .01 White / RAL 9010
  - ☒ .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact: [support@om-light.com](mailto:support@om-light.com)

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)