

Beam Adjustable

2,2W / 180lm / 2700K / DALI / Spot 14° /
ø75mm

63185



Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Adjustable version (orientable by 30° on the horizontal axis and 355° on the vertical axis).
Recessing accessory for flush version supplied separately.


LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power	2,2W		2,8W
Flux	200lm		180lm
Efficiency	91lm/W		64lm/W
LOR	-		90%
UGR	-		<10



Ø70 (trim version)

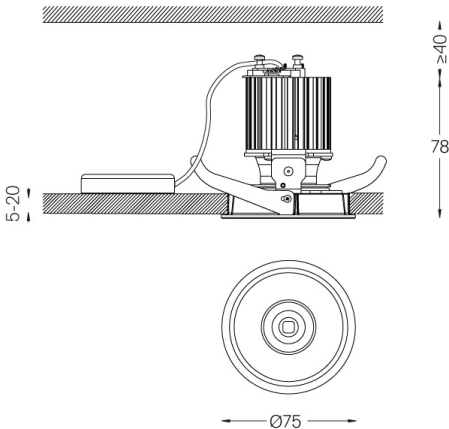

Finishes
○ .04 Matt White
● .05 Matt Black

Optional
59063 Flush accessory (12.5mm ceilings)
176x17mm
59064 Flush accessory (15mm ceilings)
176x19,5mm
59065 Flush accessory (25mm ceilings)
176x29,5mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier 4053560279