

52W / 3480lm / 2700K / DALI / Medium 31° /
1200mm

63359

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with
electrostatic 100% polyester paint with textured-
finish.

Focal-lens with complex surface and individual
complex surface ribs to provide a focal point through
an aperture for glare free area illumination.

Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power		52W	61,2W
Flux		4800lm	3480lm
Efficiency		92lm/W	57lm/W
LOR		-	73%
UGR		-	<10




Beam angle
Medium 31°

Application



Weight
0,6Kg

image not found or type unknown

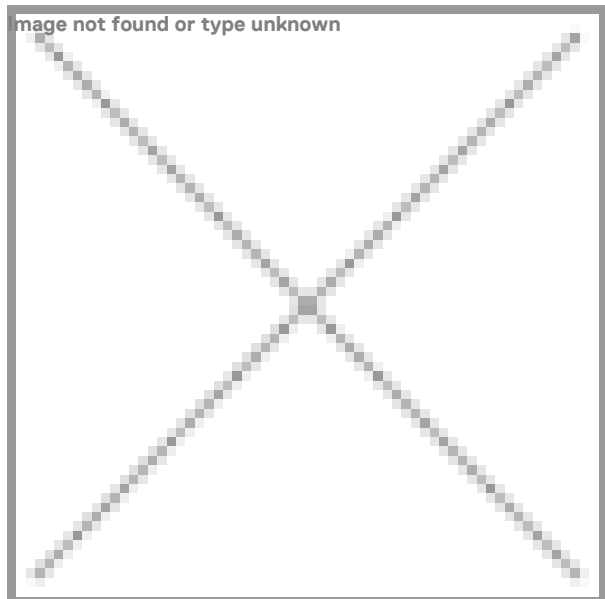

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of
material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class F
Model Identifier 4053560342LH