

27W / 2600lm / 4000K / DALI / Flood 52° /  
1200mm

63448

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with  
electrostatic 100% polyester paint with textured-  
finish.

Focal-lens with complex surface and individual  
complex surface ribs to provide a focal point through  
an aperture for glare free area illumination.

Special springs available on request.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		27W	32,9W
Flux		3440lm	2600lm
Efficiency		127lm/W	79lm/W
LOR		-	76%
UGR		-	<13




Beam angle  
Flood 52°

Application



Weight  
0,6Kg

image not found or type unknown

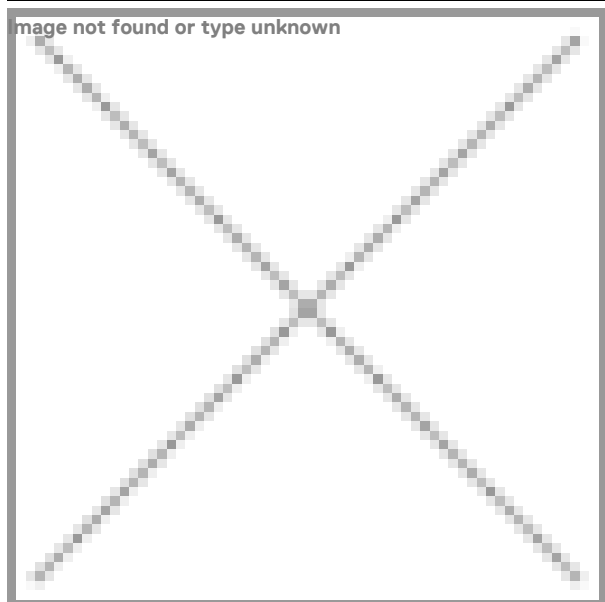

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of  
material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class D  
Model Identifier 4053560345L