




Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Lightcore optics for defined and perfectly controlled beam of light.
Recessing accessory supplied separately.


LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		5,6W	7W
Flux		490lm	370lm
Efficiency		88lm/W	53lm/W
LOR		-	76%
UGR		-	<10



Beam angle	Medium 40°
Application	
Weight	

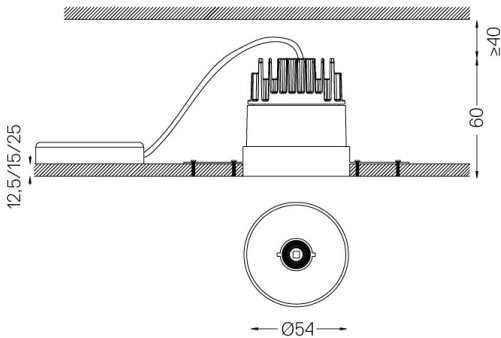

- Finishes
- .01 White / RAL 9010
 - .02 Black / RAL 9005

- Mandatory
- 59039** Trimless accessory (12.5mm ceilings)
155x18mm
 - 59040** Trimless accessory (15mm ceilings)
155x20mm
 - 59041** Trimless accessory (25mm ceilings)
155x30mm

- Optional
- 59083** Removal tool

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G
Model Identifier 4053560313H