

3,1W / 230lm / 3000K / DALI / Flood 56° /  
ø39mm

63533




Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 3,1W         | 4W        |
| Flux       |       | 260lm        | 230lm     |
| Efficiency |       | 84lm/W       | 58lm/W    |
| LOR        |       | -            | 88%       |
| UGR        |       | -            | <16       |




Beam angle  
Flood 56°

Application



Weight

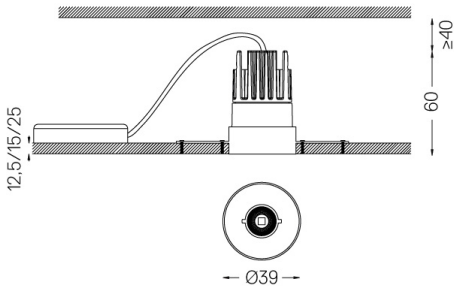

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 59042** Trimless accessory (12.5mm ceilings)  
140x18mm
- 59043** Trimless accessory (15mm ceilings)  
140x20mm
- 59044** Trimless accessory (25mm ceilings)  
140x30mm

Optional

- 59083** Removal tool

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class G  
Model Identifier 4053560290L