

5,6W / 200lm / 3000K / On/Off / Spot 15° / ø60mm

63566



Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Orientable by 20° horizontal rotation.  
Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 5,6W         | 7W        |
| Flux       |       | 440lm        | 200lm     |
| Efficiency |       | 79lm/W       | 29lm/W    |
| LOR        |       | -            | 45%       |
| UGR        |       | -            | <10       |



Beam angle  
Spot 15°


Application



Weight  
0,58Kg



Ø54

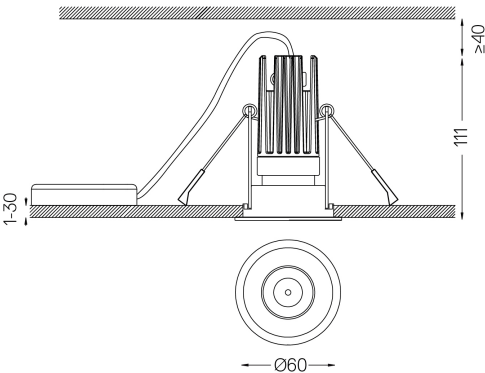

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G  
Model Identifier 4053560290H