



Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Orientable by 20° horizontal rotation and 355° vertical rotation.  
Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam.  
Recessing accessory supplied separately.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 4000K  | Light Source | Luminaire |
|------------|--------|--------------|-----------|
| Power      | 5,6W   |              | 7W        |
| Flux       | 480lm  |              | 215lm     |
| Efficiency | 86lm/W |              | 31lm/W    |
| LOR        | -      |              | 45%       |
| UGR        | -      |              | <10       |




Beam angle  
Spot 15°

Application



Weight  
0,58Kg

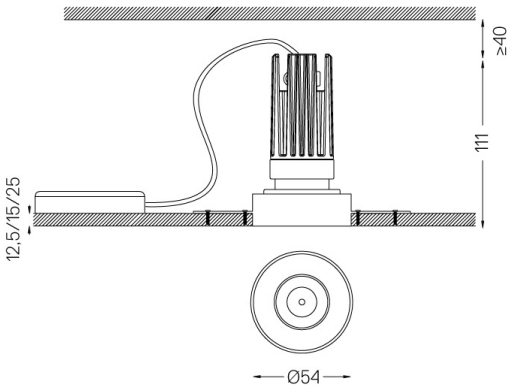

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 59039** Trimless accessory (12.5mm ceilings) 155x18mm
- 59040** Trimless accessory (15mm ceilings) 155x20mm
- 59041** Trimless accessory (25mm ceilings) 155x30mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G Model Identifier 4053560313H