

9,8W / 930lm / 3000K / DALI / Flood 56° /  
ø85mm

63609



Design: O/M + Bartenbach GmbH

Surface/Pendant luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.


Spot-lens with individual complex surface ribs to provide a focal light and an extremely narrow beam.

Fitting accessories ordered separately

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 9,8W         | 12,3W     |
| Flux       |       | 1035lm       | 930lm     |
| Efficiency |       | 106lm/W      | 76lm/W    |
| LOR        |       | -            | 90%       |
| UGR        |       | -            | <19       |

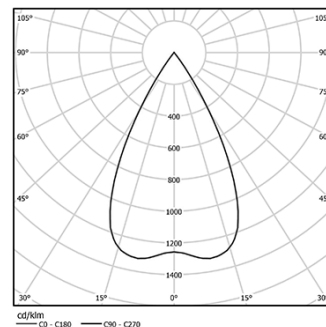


Beam angle  
Flood 56°

Application



Weight  
0,53Kg

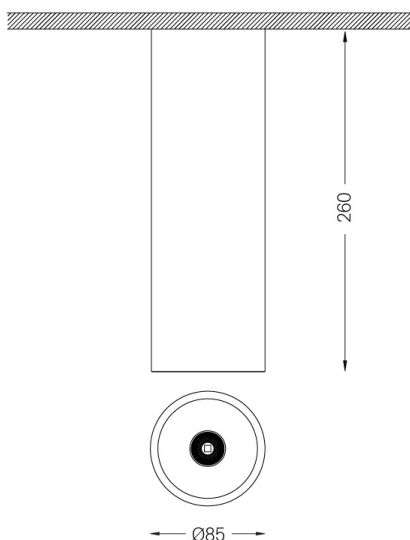

#### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

#### Mandatory

59051 Accessory for pendant installation  
ø80x35mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 2053560257H