

5,6W\* / 380lm\* / 2200K-5000K / DALI /  
Flood 56° / ø85mm

63645




Design: O/M + Bartenbach GmbH  
Surface/Pendant luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Spot-lens with individual complex surface ribs to provide a focal light and an extremely narrow beam.  
Fitting accessories ordered separately

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included. DALI DT8  
IP20 | 230Vac | 50/60Hz




LED	2200K-5000K	Light Source	Luminaire
Power		5,6W*	7W*
Flux		460lm*	380lm*
Efficiency		82lm/W	58lm/W
LOR		-	83%
UGR		-	<10



Beam angle  
Flood 56°

Application

Weight  
0,53Kg

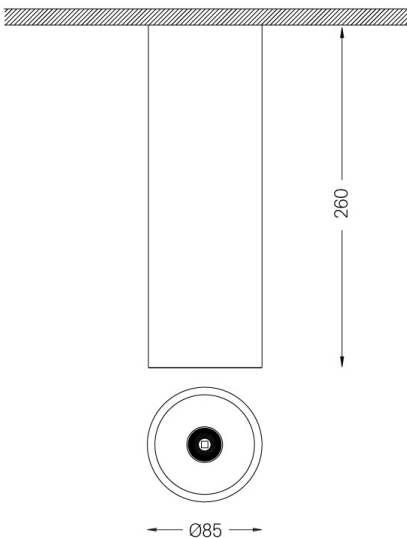

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

### Mandatory

59051 Accessory for pendant installation  
ø80x35mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com