

## inFinit

### Pendant direct/indirect

56+70W\* / 6000+4400lm\* / 2200K-5000K /  
DALI / Wide flood 76° / batwing / 2920mm

63771

Minimum quantity requested for purchase orders  
(>200m)



Design: OM + Bartenbach GmbH

Pendant direct and indirect luminaire with housing made of aluminium in matte finish.

Aluminium anodised end caps with matt finish.

Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

Indirect light: Linear lenses for batwing effect protected by a transparent polycarbonate diffuser. Fitting accessories ordered separately.


LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



| LED        | 2200K-5000K | Light Source | Luminaire    |
|------------|-------------|--------------|--------------|
| Power      |             | 56+70W*      | 66+80W*      |
| Flux       |             | 7500+5500lm* | 6000+4400lm* |
| Efficiency |             | 103lm/W      | 70lm/W       |
| LOR        |             | -            | 80%          |
| UGR        |             | -            | <19          |




Beam angle  
Wide flood 76° /  
batwing

Application



Weight  
4,7Kg

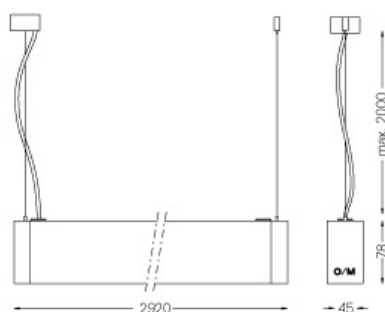

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59054 Pendant direct/indirect fitting accessory

56051 Clear Base DALI

ø60x35mm