


14+28W / 1360+1280lm / 3000K / DALI /
Flood 64° / batwing / 1152mm

63772

Product timing available by request

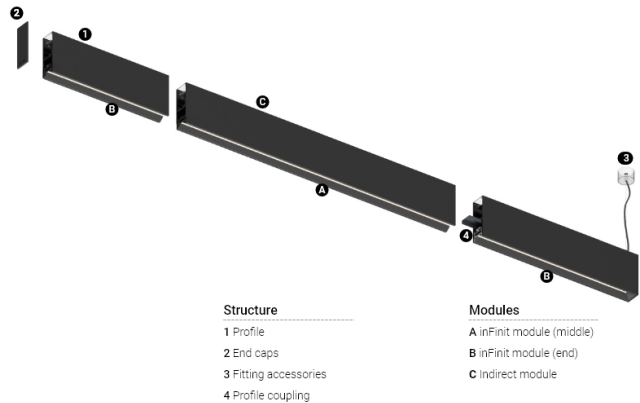

Design: OM + Bartenbach GmbH

Pendant direct and indirect module with housing made of aluminium with electrostatic 100% polyester paint.

Direct light: Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

Indirect light: Linear lenses for batwing effect protected by a transparent polycarbonate diffuser.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



| LED | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-------------|
| Power | | 14+28W | 17,1+34,1W |
| Flux | | 1680+1600lm | 1360+1280lm |
| Efficiency | | 78lm/W | 52lm/W |
| LOR | | - | 80% |
| UGR | | - | <16 |




Beam angle
Flood 64° /
batwing



Application

Weight

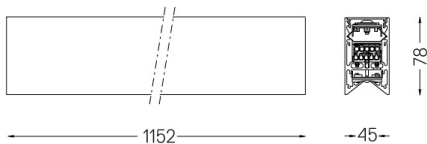

Finishes

- .04 Matt White
- .05 Matt Black

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com