

17+35W / 1800+1700lm / 4000K / DALI /  
Flood 64° / batwing / 1440mm

63782

Product timing available by request



Design: OM + Bartenbach GmbH

Pendant direct and indirect module with housing made of aluminium with electrostatic 100% polyester paint.

Direct light: Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

Indirect light: Linear lenses for batwing effect protected by a transparent polycarbonate diffuser.


LED CRI&gt;90 / &gt;50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		17+35W	20,7+41,2W
Flux		2250+2150lm	1800+1700lm
Efficiency		85lm/W	57lm/W
LOR		-	80%
UGR		-	<16




Beam angle  
Flood 64° /  
batwing

Application



Weight

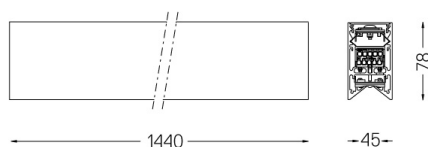

Finishes

- .04 Matt White
- .05 Matt Black

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com