

39W / 3720lm / 4000K / On/Off / Medium  
 31° / 911mm

**63969**



Design: O/M + Bartenbach GmbH

Surface or pendant luminaire with housing made of aluminium with electrostatic 100% polyester paint with textured finish.


Aluminium anodised end caps with electrostatic 100% polyester paint with textured-finish.

Housing and perforated cover plate made of aluminium with textured-paint finish. With the latest Bartenbach GmbH technology, inVision45 is a discreet solution, that can use great light distribution and visual comfort from a nearly invisible source. Fitting accessories for pendant version ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam  
 Power supply included.  
 IP20 | 230Vac | 50/60Hz



| LED        | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 39W          | 45,9W     |
| Flux       |       | 5100lm       | 3720lm    |
| Efficiency |       | 131lm/W      | 81lm/W    |
| LOR        |       | -            | 73%       |
| UGR        |       | -            | <10       |

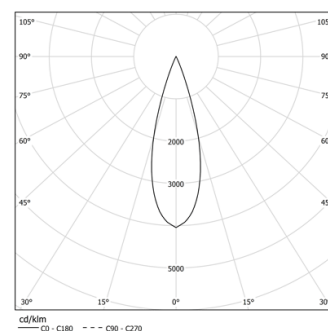


Beam angle  
**Medium 31°**

Application



Weight  
**1,9Kg**

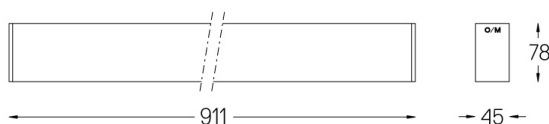

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

**54036** Pendant direct fitting accessory

**54034** Clear Base

ø60x35mm