


45+90W / 1700+3400lm / 2700K / DALI /
 Diffuse Direct/ Indirect / 2895mm

64150

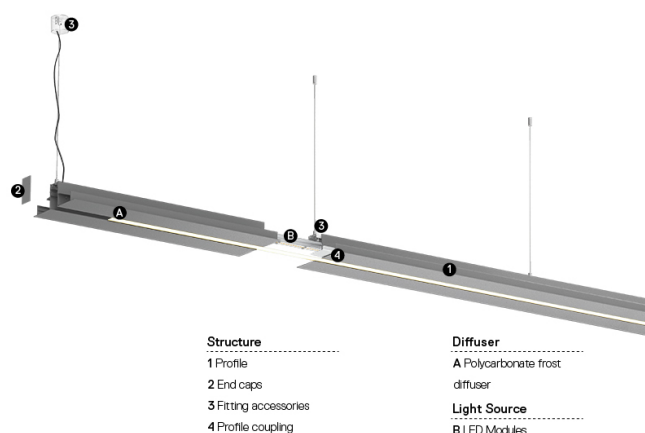

Design: Eduardo Souto de Moura

MGB Pendant Indirect module with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser with user friendly clipping system.

Steel end caps with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser for direct light and indirect light.

Fitting accessories supplied separately.


LED CRI>90 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power		45+90W	65+130W
Flux		4250+8500lm	1700+3400lm
Efficiency		94lm/W	26lm/W
LOR		-	40%
UGR		-	<25



Beam angle
 Diffuse Direct/
 Indirect

Application



Weight
 14Kg



Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

56051 Clear base DALI

Ø60x35mm

54081 Aluminium base DALI

Ø60x37mm

For the specific supply of "DALI 2" drivers, please contact:
 support@om-light.com