

45+90W / 1700+3400lm / 2700K / DALI /  
Diffuse Direct/ Indirect / 2895mm

64150



Design: Eduardo Souto de Moura

MGB Pendant Indirect module with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser with user friendly clipping system.

Steel end caps with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser for direct light and indirect light.

Fitting accessories supplied separately.


LED CRI&gt;90 / &gt;50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



| LED        | 2700K | Light Source | Luminaire   |
|------------|-------|--------------|-------------|
| Power      |       | 45+90W       | 65+130W     |
| Flux       |       | 4250+8500lm  | 1700+3400lm |
| Efficiency |       | 94lm/W       | 26lm/W      |
| LOR        |       | -            | 40%         |
| UGR        |       | -            | <25         |

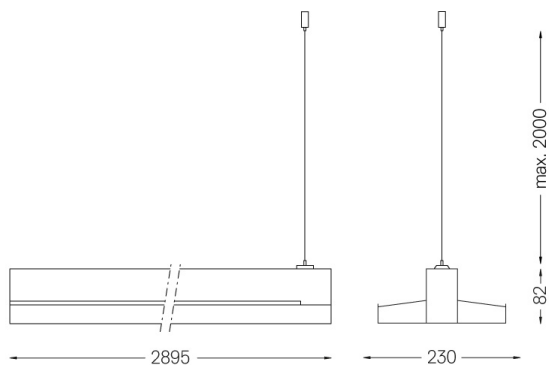

## Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

## Mandatory

56051 Clear base DALI

Ø60x35mm

54081 Aluminium base DALI

Ø60x37mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com