

23+45W / 850+1700lm / 2700K / DALI /  
Diffuse Direct/ Indirect / 1411mm

64168



Design: Eduardo Souto de Moura  
MGB Pendant Indirect module with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.  
Frosted acrylic diffuser with user friendly clipping system.  
Steel end caps with textured electrostatic 100% polyester paint.  
Frosted acrylic diffuser for direct light and indirect light.  
Fitting accessories supplied separately.

LED CRI>90 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




LED	2700K	Light Source	Luminaire
Power		23+45W	33+65W
Flux		2125+4250lm	850+1700lm
Efficiency		94lm/W	26lm/W
LOR		-	40%
UGR		-	<25



Beam angle  
Diffuse Direct/  
Indirect

Application

Weight  
7Kg

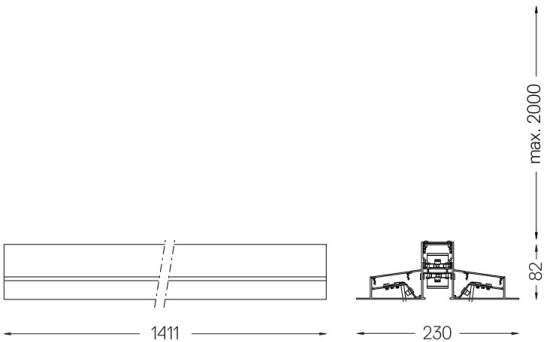

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory  
56051 Clear base DALI  
Ø60x35mm  
54081 Aluminium base DALI  
Ø60x37mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com