

Over Track

**5,6W / 410lm / 3000K / On/Off / Flood 59° /
ø45mm**

64534


Design: O/M + Bartenbach GmbH


Track-mounted spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish. Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam. Orientable by 150° horizontal rotation and 330° vertical rotation.

Driver included.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Driver included
IP20 | 48Vdc




 LED	3000K	Light Source	Luminaire
Power		5,6W	7W
Flux		460lm	410lm
Efficiency		82lm/W	59lm/W
LOR		-	89%
Operating Condition		-	48Vdc

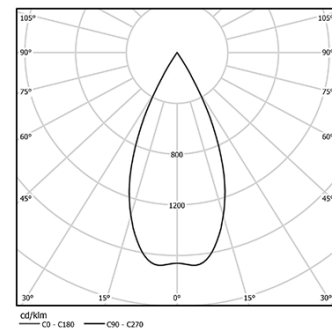

Beam angle
Flood 59°

Application

Weight
0,27Kg

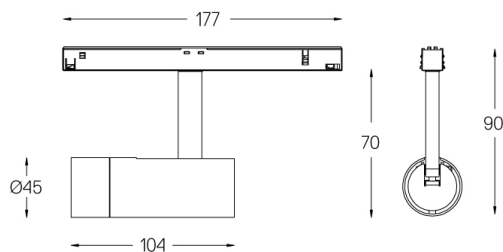

Finishes

- ☐ .01 White / RAL 9010
☒ .02 Black / RAL 9005

Optional

59072 1/4 CTO

ø35x1,1mm

59073 1/2 CTO

ø35x1,1mm

59074 Louvre

ø35x2mm

59075 Soft diffuser

ø35x2mm