

66W / 9030lm / 3000K / DALI / Diffuse /
ø850mm

64563

Design: O/M

Recessed luminaire made of aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions.

Frosted acrylic diffuser with perfect light uniformity.

Recessing accessories supplied separately.

LED: CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP43 | 230Vac | 50/60Hz




| LED | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 66W | 77,6W |
| Flux | | 11130lm | 9030lm |
| Efficiency | | 169lm/W | 116lm/W |
| LOR | | - | 81% |
| UGR | | - | <25 |



Beam angle
Diffuse

Application

Weight
8,5Kg

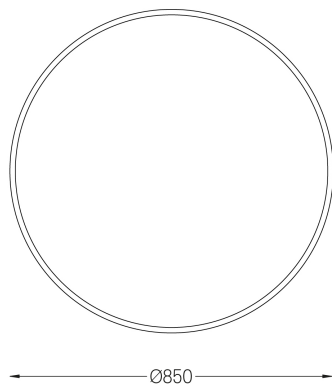

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

59079 Recessed fitting accessory
Ø858x958x134mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Recessed accessory for different ceiling heights under request

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class D
Model Identifier 89603018