

66W / 9570lm / 4000K / On/Off / Diffuse /  
ø850mm

64566

Design: O/M

Recessed luminaire made of aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions. Frosted acrylic diffuser with perfect light uniformity. Recessing accessories supplied separately.

LED: CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP43 | 230Vac | 50/60Hz




| LED        | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 66W          | 77,6W     |
| Flux       |       | 11800lm      | 9570lm    |
| Efficiency |       | 179lm/W      | 123lm/W   |
| LOR        |       | -            | 81%       |
| UGR        |       | -            | <25       |



Beam angle  
Diffuse

Application

Weight  
8,5Kg

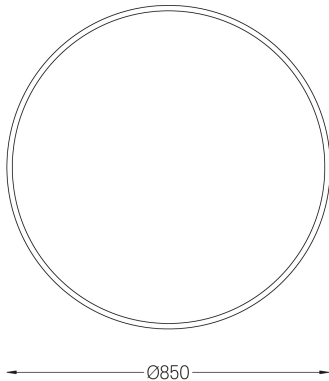

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

### Mandatory

59079 Recessed fitting accessory  
Ø858x958x134mm

Recessed accessory for different ceiling heights under request

### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603019