



Go

Asymmetric

6,7W / 3,4W / 585lm / 295lm / 4000K /
Asymmetric / ø75mm

64759




Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP44 | 200mA / 100mA



| | | |
|--|---------------------|------------------|
|  4000K | Light Source | Luminaire |
| Power | 6,7W / 3,4W | 6,7W / 3,4W |
| Flux | 1065lm / 535lm | 585lm / 295lm |
| Efficiency | 159lm/W | 87lm/W |
| LOR | - | 55% |
| UGR | - | - |

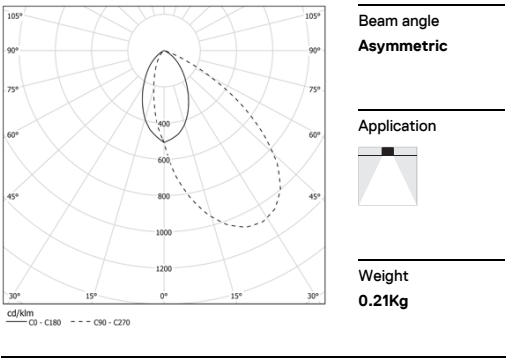



Ø65



Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59101 Driver On/Off [200mA]

147x43x30mm

59100 Driver On/Off [100mA]

110x40x21mm

59103 Driver DALI [200mA]

144x30x21mm

59102 Driver DALI [100mA]

144x30x21mm

59105 Driver PhaseCut [180mA]

102x49x29mm

59104 Driver PhaseCut [100mA]

122x41x23mm

59107 Driver 1-10V [200mA]

130x30x20mm

59106 Driver 1-10V [120mA]

130x30x20mm

Optional

59134 Flush accessory (12.5mm ceilings)

140x82x16,5mm

59135 Flush accessory (15mm ceilings)

140x82x19,5mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E
Model Identifier BXRE-40G10FB-C-83