

3,7W / 300lm / 2700K / Flood 60° /  
50x50mm

64798




Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP44 | 100mA




LED	2700K	Light Source	Luminaire
Power	3,7W	3,7W	3,7W
Flux	375lm	300lm	300lm
Efficiency	101lm/W	81lm/W	81lm/W
LOR	-	80%	80%
UGR	-	<22	<22



Beam angle  
Flood 60°

Application

Weight  
0.08Kg

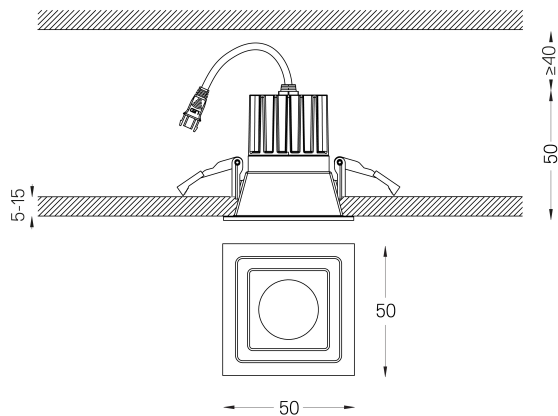

Finishes

○ .04 Matt White  
● .05 Matt Black

Mandatory

**59088** Driver On/Off [100mA]  
138x30x21mm

**59089** Driver DALI [100mA]  
144x30x21mm

**59090** Driver PhaseCut [100mA]  
122x41x23mm

**59091** Driver 1-10V [120mA]  
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)  
The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations  
2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-27G1000-B-83