



**3,7W / 300lm / 3000K / Flood 60° / ø50mm**

64825


Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 100mA



 LED	3000K	Light Source	Luminaire
Power	3,7W		3,7W
Flux	395lm		300lm
Efficiency	107lm/W		81lm/W
LOR	-		76%
UGR	-		<22



Beam angle  
Flood 60°


## Application



Weight  
0.08Kg



045

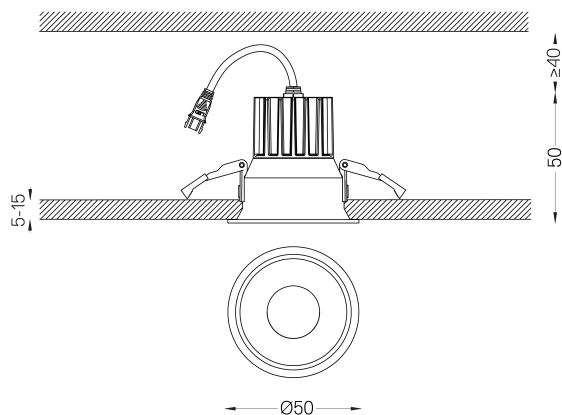

## Finishes

- **.04 Matt White**  
● **.05 Matt Black**

**Mandatory**

**59088 Driver On/Off [100mA]**

138x30x21mm

59089 Driver DALI [100mA]

144x30x21mm

59090 Driver PhaseCut [100mA]

122x41x23mm

**59091 Driver 1-10V [120mA]**

130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

The 5-year guarantee applies only when the luminaire and driver are supplied together.

### Data according to regulations

2019/2021/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-30G1000-B-83