

5,6W / 200lm / 2700K / On/Off / Spot 16° /
ø45mm

64884



Design: O/M + Bartenbach GmbH
Surface spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish.
Spot-lens with individual complex surface ribs to provide a focal light and an extremely narrow beam.
Orientable by 150° horizontal rotation and 330° vertical rotation.
Driver to be ordered separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Driver to be ordered separately.
IP20 / 450mA




| LED | 2700K | Light Source | Luminaire |
|---------------------|-------|--------------|----------------|
| Power | | 5,6W | 5,6W |
| Flux | | 440lm | 200lm |
| Efficiency | | 79lm/W | 29lm/W |
| LOR | | - | 45% |
| Operating Condition | | - | Current source |



Beam angle
Spot 16°

Application

Weight
0,30Kg

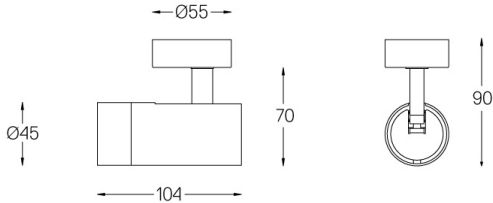

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 59084** Driver On/Off [Up to 2 luminaires]
140x30x21mm
- 59085** Driver On/Off [Up to 3 luminaires]
163x30x21mm
- 59086** Driver DALI [Up to 2 luminaires]
140x30x21mm
- 59087** Driver DALI [Up to 3 luminaires]
163x30x21mm

Optional

- 59072** 1/4 CTO
ø35x1,1mm
- 59073** 1/2 CTO
ø35x1,1mm
- 59074** Louvre
ø35x2mm
- 59075** Soft diffuser
ø35x2mm