

5,6W / 215lm / 4000K / On/Off / Spot 16° /  
ø45mm

64890



Design: O/M + Bartenbach GmbH

Surface spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish.

Spot-lens with individual complex surface ribs to provide a focal light and an extremely narrow beam.

Orientable by 150° horizontal rotation and 330° vertical rotation.

Driver to be ordered separately.


LED CRI>90 / >50.000h, L80/B10

2-step MacAdam / Driver to be ordered separately.

IP20 / 450mA




LED	4000K	Light Source	Luminaire
Power		5,6W	5,6W
Flux		480lm	215lm
Efficiency		86lm/W	31lm/W
LOR		-	45%
Operating Condition		-	Current Source



Beam angle  
Spot 16°

Application

Weight  
0,30Kg

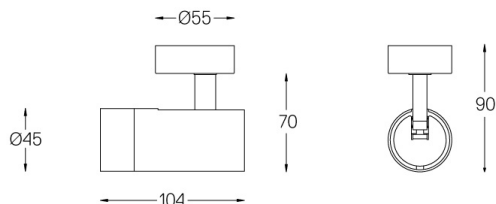

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

### Mandatory

**59084** Driver On/Off [Up to 2 luminaires]

140x30x21mm

**59085** Driver On/Off [Up to 3 luminaires]

163x30x21mm

**59086** Driver DALI [Up to 2 luminaires]

140x30x21mm

**59087** Driver DALI [Up to 3 luminaires]

163x30x21mm

### Optional

**59072** 1/4 CTO

ø35x1,1mm

**59073** 1/2 CTO

ø35x1,1mm

**59074** Louvre

ø35x2mm

**59075** Soft diffuser

ø35x2mm